
© EUCHNER GmbH + Co. KG


Maße in mm / Dimensions in mm

Technische Änderungen vorbehalten, alle Angaben ohne Gewähr / Subject to technical modifications; no responsibility is accepted for the accuracy of this information.


...-R-...

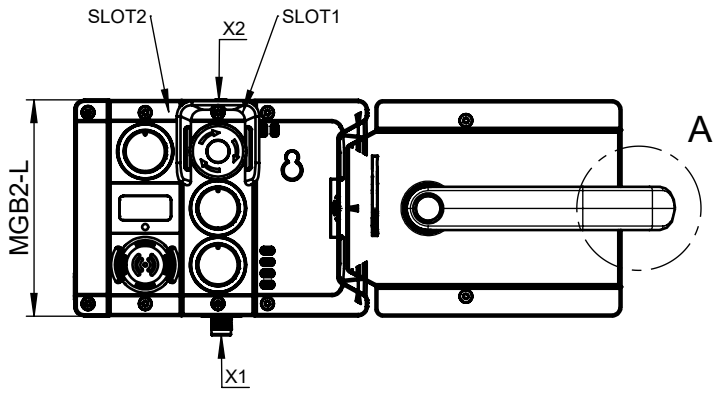

Detail A
Sperreinsatz im ausgefahrenen Zustand
Automatic lockoutbar in "open" position.



...-L-...



Inklusive:
- Einlegeschild-Set 12,5x27mm (ohne Aufschrift)
  1x rot
  1x gelb
  1x blau
  1x schwarz

Including:
- Insertion plate-Set 12,5x27mm (without inscription)
  1x red
  1x yellow
  1x blue
  1x black

Inklusive:
- Schlüssel FlexFunction A-FLX-K-OA-...

Including:
- FlexFunction key A-FLX-K-OA-..

MGB2-H + OPTION:
Bitte Datenblatt 2150276 beachten
Please observe data sheet 2150276

Betriebsanleitung beachten
(bei Abweichungen zwischen Datenblatt und Betriebsanleitung gelten die Daten des Datenblattes)
Please observe the operating instructions
(in case of disagreement between data sheet and operating instructions, the information of the data sheet are to be considered)



	MGB2-L...	MSM... (SLOT1)	MSM... (SLOT2)	AC-MC... (X1)	AC-MC... (X2)	MGB2-H...	MGB-E...
MGB2-**L1**HE-MLI-U-CA-**R**-174494	136776	172953	172950	157024	156718	136691	100465
MGB2-**L1**HE-MLI-U-CA-**L**-174495	136776	172953	172950	156718	157024	156394	100465

Übersicht der Kommunikationsdaten:
Overview of the communication data:

Input

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	LM1_E_G	LM1_E_ER	LM1_E_SM1	LM1_E_SM0	-	LM1_I_UK	LM1_I_SK	LM1_D_RUN
2nd Byte	-	-	-	-	-	LM1_I_OL	LM1_I_OT	LM1_I_OD
3rd Byte	Diagnose Byte (pluggable)							

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	LM1_SM1_E_S1	-	-	LM1_SM1_I_S3	LM1_SM1_I_S2	LM1_SM1_I_S1
2nd Byte	Diagnose Byte (pluggable)							

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	LM1_SM2_E_S3	-	LM1_SM2_E_S1	-	-	LM1_SM2_I_S3	LM1_SM2_I_S3_E	LM1_SM2_I_S1
2nd Byte	Diagnose Byte (pluggable)							

Ethernet[1] SAFE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
⚠	-	-	-	LM1_SM2_FI_S3	LM1_SM2_FI_S1	LM1_SM1_FI_ES	LM1_FI_UK	LM1_FI_SK

Output

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	LM1_ACK_G	LM1_ACK_ER	-	-	-	-	-	LM1_O_CL

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	LM1_SM2_O_H3_B	LM1_SM2_O_H2_B	LM1_SM2_O_H1_B	LM1_SM2_O_H3	LMM1_SM2_O_H2	LM1_SM2_O_H1

Ethernet[1] standard	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1st Byte	-	-	-	LM1_SM1_O_H3_Rd_B	LM1_SM1_O_H3_Gn_B	LM1_SM1_O_J3	LM1_SM1_O_H3_Rd	LM1_SM1_O_H3_Gn

Ethernet[1] SAFE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
⚠	-	-	-	-	-	-	-	LM1_FO_CL

[1] Ethernet Protokoll in Abhängigkeit des verwendeten MBM Busmodul / Ethernet protocol according to the used MBM Busmodul

EUCHNER GmbH + Co. KG Kohlhammerstraße 16 70771 Leinfelden-Echterdingen Tel. +49/711/7597-0 Fax +49/711/753316 www.euchner.de info@euchner.de